


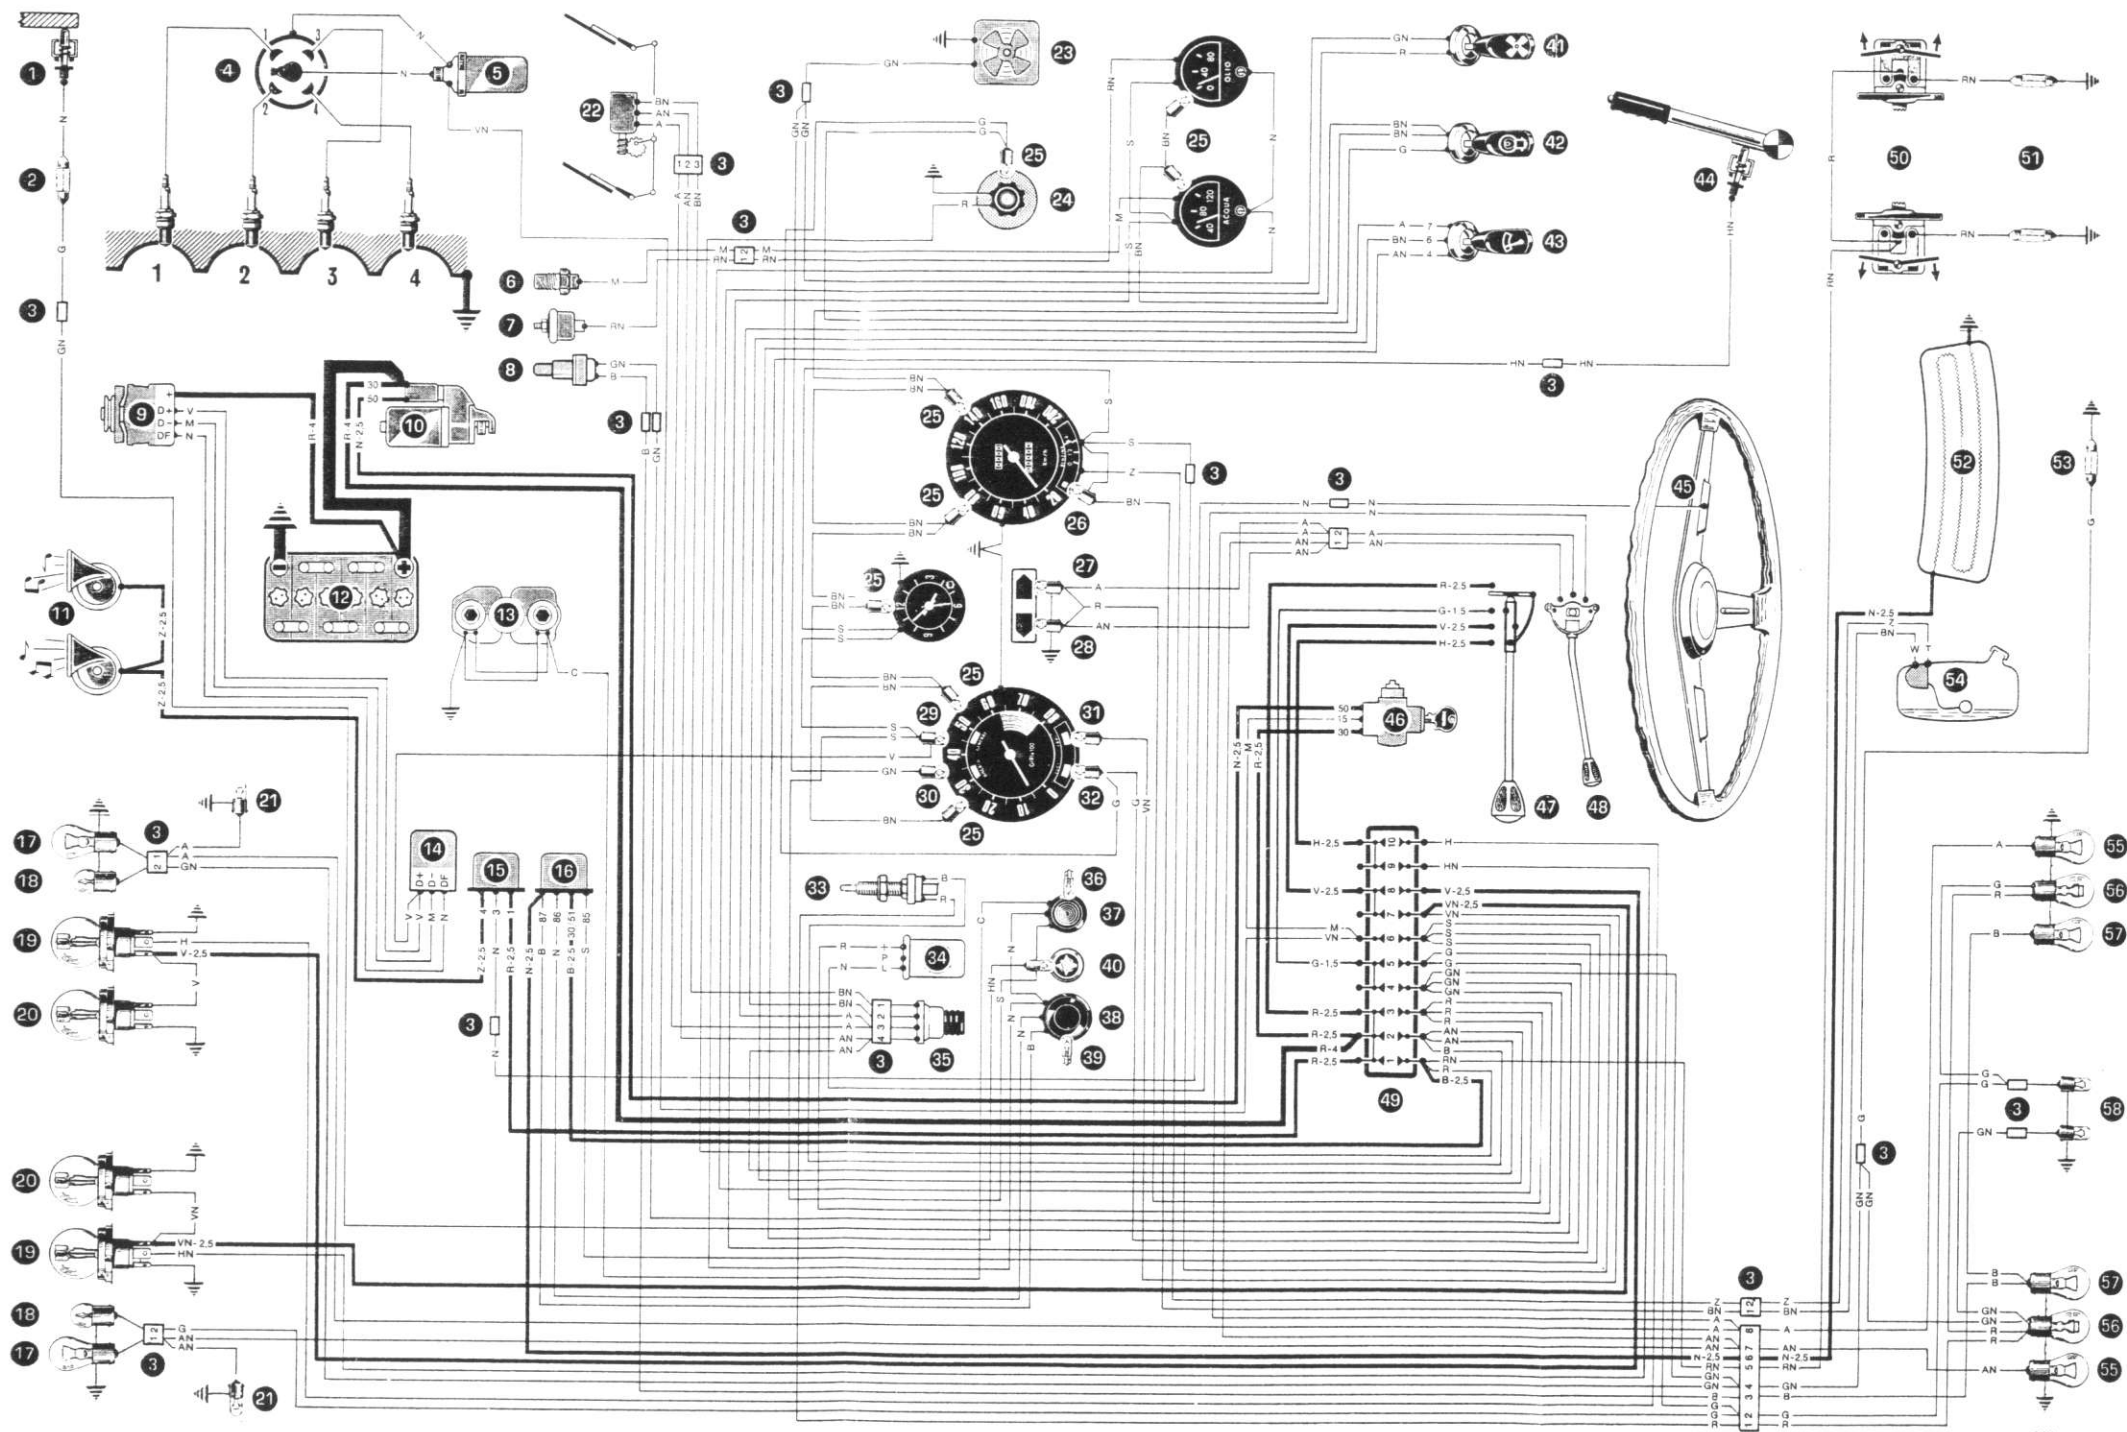

WIRING DIAGRAM

DEVICES

- 3 Junction boxes and connectors
- 4 Distributor . . . BOSCH JF 4
- 5 Coil BOSCH K 12 V
- 6 Coolant thermometer sender
- 7 Oil pressure gauge sender
- 9 Alternator . . . BOSCH K1 14 V 35A 20
- 10 Starter BOSCH EF (R) 12V 0,7 PS
- 11 Horn
- 12 Battery 12V - 60 Ah
- 13 Brake fluid level warning light switches
- 14 Voltage regulator . . . BOSCH AD 1/14 V
- 15 Horn relay
- 16 Heated rear window relay
- 22 Windscreen wiper (two speed) MARELLI TGE 145A
- 23 Blower motor BOSCH WS 4902 AR 5A (O)
- 24 Cigarette lighter
- 34 Flasher unit
- 35 Windscreen washer, foot operated
- 49 Fusebox
- 52 Heated rear window
- 54 Fuel level sender

SWITCHES

- 1 Engine compartment light
- 8 Reversing lights
- 33 Stop lights
- 38 Heated rear window
- 41 Blower
- 42 Instrument lights
- 43 Windscreen wiper (two speed)
- 44 Parking brake warning light
- 45 Horn control
- 46 Ignition and starting
- 47 Parking lights, headlamps and flashing
- 48 Direction indicators
- 50 Ceiling light

BULBS

- 2 Engine compartment light . . . 5 W
- 17 Front direction indicators . . . 21 W
- 18 Front parking lights 5 W
- 19 Headlamp Hi/Low 45/40 W
- 20 Headlamp Hi 45/40 W
- 21 Side direction indicators . . . 4 W
- 25 Instrument lights 3 W
- 26 Reserve warning light 3 W
- 27 Direction indicators warning light, R.H. 1.2 W
- 28 Direction indicators warning light, L.H. 1.2 W
- 29 Alternator warning light . . . 3 W
- 30 Blower warning light 3 W
- 31 High beam warning light . . . 3 W
- 32 Parking light warning 3 W
- 36 Warning light for fluid level . 1.2 W
- 39 Heated rear window warning light 1.2 W
- 40 Parking brake warning light . 1.2 W
- 51 Ceiling light 5 W
- 53 Boot light 5 W
- 55 Rear direction indicators . . . 21 W
- 56 Rear parking and stop lights 5/21 W
- 57 Reversing lights 21 W
- 58 Number plate light 4 W


CABLE COLOUR CODE

- | | |
|----------|-----------------|
| A blue | V green |
| B white | Z violet |
| C orange | AB blue/white |
| G yellow | AN blue/black |
| H grey | BN white/black |
| M brown | GN yellow/black |
| N black | HN grey/black |
| R red | RN red/black |
| S pink | VN green/black |

The figure following the colour code on the diagram shows the wire gauge in mm². Where not shown the wire gauge is 1 mm².

PLATE ON FUSEBOX

- 1, 2, 3 Main devices
- 4, 5 Parking lights
- 6 Indicating devices
- 7 L.H. high beam
- 8 R.H. high beam
- 9 L.H. low beam
- 10 R.H. low beam

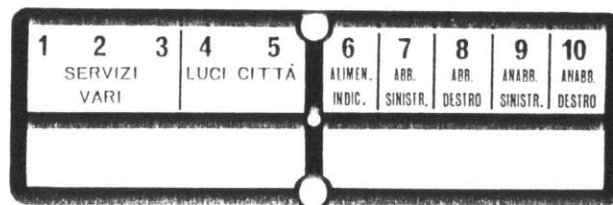

RECOMMENDED LUBRICANTS

PART	Quantity		GRADE	AGIP	Esso	Shell
	lt.	kg				
Engine (Danger level Full Total in circuit)	4.4 6.4 7.22	4.000 5.800 6.550	SAE 20 W/50 API MS	AGIP F.1 Woom SAE 20 W/50	UNIFLO	SHELL Super Motor Oil "100"
Gearbox Steering box and differential	1.85 1.4 0.4	1.650 1.250 0.360	SAE 90 API EP	AGIP F.1 Rotra MP SAE 90	ESSO Gear Oil GX 90	SHELL Spirax 90 HD
Propeller shaft sliding yoke			NLGI 1	AGIP F.1 Grease 15	ESSO Multi-purpose Grease H	SHELL Retinax G
Front wheel bearings			NLGI 2/3	AGIP F.1 Grease 33 FD	ESSO Norva 275	SHELL Retinax AX

SAE - Society of Automotive Engineers

API - American Petroleum Institute

NLGI - National Lubricating Grease Institute

In countries where the above mentioned lubricants are not available, it is possible to replace them with products of other leading makes provided that in accordance with the grades given in the table.

TYRES

Inflation pressures when cold (kg/cm²)

		front	rear	
155 x 15"	CEAT D1 *	1.6	1.7	With reduced load & touring riding
		1.8	2.1	With full load and top range of speed
	MICHELIN ZX	1.6	1.7	With reduced load & touring riding
		1.7	2	With full load and top range of speed
	PIRELLI Cinturato S	1.6	1.7	With reduced load & touring riding
		1.8	2.1	With full load and top range of speed
165 x 14"	KLEBER COLOMBES V10 GT	1.6	1.7	With reduced load & touring riding
		1.9	2.2	With full load and top range of speed
	CEAT D2 CONTINENTAL Conti TT 714* CONTINENTAL Conti TT 715 GOOD YEAR - G 800 PIRELLI Cinturato SR	1.5	1.6	Under all conditions
		1.7	1.8	
	MICHELIN ZX	1.7	2	With reduced load & touring riding
		1.9	2.2	With full load and top range of speed

* for 1.3 only

ALFA ROMEO
Via Gattamelata, 45
20149 MILANO

DIASS - Public. N. 1933 - 6/72 - 2700 - Printed in Italy - Off. Graf. Morell - Osnago (Co)
Stampato su carta Burgo Solex da gr. 200 e 100 al mq. All rights reserved.
This book, or parts thereof, may not be reproduced in any form without permission of ALFA ROMEO S.p.A.